


**GSW-20 Control Unit** 



Connections are made as per wiring diagram overleaf. If in doubt have a qualified electrician make all wiring connections.

If the controller is to be fitted to an older machine without the external relay, drill two holes (M3) between the spring housings.

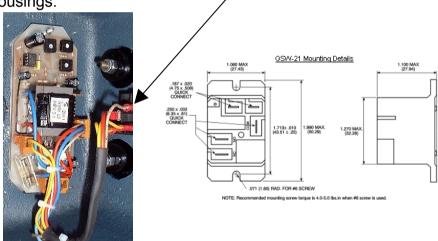

## Please ensure that the probe is in good working order before installing control unit.

The Microseal control units GSW-20M are supplied without the front facia plate as the Microseal has the plate fixed to the machine. The unit is therefore TESTED but NOT Calibrated to the facia scale.

